




COMMERCIAL CYCLE SERVICE/ DUAL PURPOSE

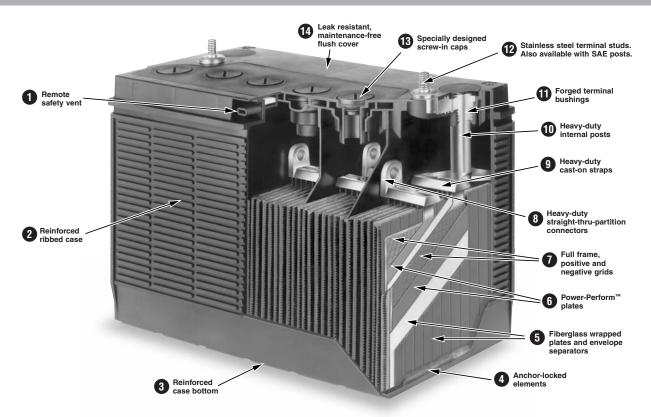

- Remote safety vent is flame retardant. Provides corrosion-free operation for longer life.
- 2 Polypropylene ribbed case is reinforced to withstand abusive commercial service for long life.
- 3 Reinforced case bottom resists punctures from stones and foreign objects, extending battery life.
- 4 Anchor-locked elements resist pounding vibration for long, reliable service life.
- 5 Fiberglass wrapped envelope separators lock active material to the plates extending battery life.
- 6 Power-Perform™ plates provide maximum power-per-pound for dependable "high cycling" service.
- Trull frame, positive and negative grids resist internal shorts for longest life.

- 8 Heavy-duty straight-thru-partition connectors reduce resistance for higher cranking amperage.
- 9 Heavy-duty cast-on straps direct more power to the terminals for highest cranking power.
- 10 Heavy-duty internal posts provide for highest current flow.
- forged terminal bushings resist leakage, black posts and corrosion, extending battery life.
- 12 Stainless steel terminal studs resist corrosion for longer service life.
- (B) With specially designed screw-in caps, battery is maintenance-free, but not maintenance-impossible.
- 4 Leak resistant, maintenance-free flush cover keeps battery top clean and dry, for safe handling and use.

				PERFORMANCE LEVEL			APPROX.	MAX OVERALL DIMENSIONS		
BCI			SUGG	0°F	RES.	32°F	SHIP	INCHES (MM)		
GROUP	PART NO.	FOOTNOTES	WARRANTY	CCA	CAP.	CA	WGT./LBS.	L	W	Н
31	DP31CS	19, 21, 22, 43, X	30 months	700	185	875	57			
31	7T31	19, 21, 22, 43, X	30 months	730	190	940	62½	13 (330)	6¾ (171)	9½ (241)
31P	7T31P	19, 21, 22, 43	30 months	730	190	940	62½			

All ratings conform to BCI specifications.

All batteries are maintenance-free calcium grids except where noted

These specifications are subject to change without notice. Batteries manufactured in polypropylene cases and covers

FOOTNOTES:

19 - Includes lifting ledges 21 - Anchor-locked elements 22 - Flush manifold vented cover Warranty is 12 months

in deep cycle service

X - 3/8" x 16 stainless steel stud posts

"POWERED FOR PERFORMANCE"®

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com

E.P.M. Form No. 0213 Rev. 12/11 © 2011 by EPM Printed in U.S.A. DISTRIBUTED BY: