



POWERED FOR PERFORMANCE®



PRO MASTER®



The **DEKA PRO MASTER BATTERY** will give you all the power you need to get through two rounds comfortably without needing a recharge – providing it is maintained and charged correctly.

The **DEKA PRO MASTER BATTERY** includes a variety of design features that allow for easy watering and installation, faster maintenance turnaround times and longer cycle life.

The **DEKA PRO MASTER BATTERY** is made with pride by quality craftsmen in state-of-the-art manufacturing facilities, and subjected to the right quality control during every phase.

CONVENIENT LIFTING HANDLE



QUALITY SYSTEM CERTIFIED
ISO 9001
ISO/TS 16949
ENVIRONMENTAL SYSTEM CERTIFIED
ISO 14001





PRO MASTER[®]

BATTERIES

FEATURES	BENEFITS
• High density oxide paste...	• Produces more energy per pound.
• Integrated "twist-and-release" vent cap "quick fill" system...	• Releases vent caps in single motion design, making maintenance a snap.
• Ergonomic lift handles...	• Reduces the risk of slippage. Designed for easier installation.
• Heavier grids and plates...	• Provides longer cycle life, better added value.
• Thicker plate straps...	• Lowers resistance, delivers better performance, longer life.
• Heavy-duty, bulge-resistant material...	• Stabilizes and protects the groups for polypropylene casing longer battery life. Resists bulging.
• Case heat sealed to the cover...	• Prevents leaks and corrosion.
• Through-partition connectors...	• Decreases internal resistance, increasing power.
• Computer-controlled production...	• Assures that grid casting, plate pasting, curing, and formation meet rigid quality specifications.
• Glass mat, dual-insulation, "deep pocket" envelope separators...	• Protects plates and locks active material to the grid to retard shedding and prevent shorts. Glass fibers strengthen plate.
• Three terminal configurations...	• Fits virtually any application.

PART NO.	20 AH CAPACITY	5 AH CAPACITY	MINS. DISCHARGED			VOLTS	QTS. (LITERS) OF ACID	APPROXIMATE WEIGHT lbs. (kgs.)		MAXIMUM OVERALL DIMENSIONS inches (mm)			FOOTNOTES
			@ 75 AMPS	@ 56 AMPS	@ 25 AMPS			WET	DRY	L	W	H	
GOLF CAR													
GC10	215	157	105	—	395	6	—	60.5 (27.4)	—	10 $\frac{1}{4}$ (260)	7 $\frac{1}{2}$ (181)	10 $\frac{1}{8}$ (276)	11,36,U
GC15	230	174	120	—	448	6	—	64 (29.0)	44 (20.0)	10 $\frac{1}{4}$ (260)	7 $\frac{1}{2}$ (181)	10 $\frac{1}{8}$ (276)	4,11,30,36,U
GC25	235	188	132	—	488	6	—	68 (30.8)	—	10 $\frac{1}{4}$ (260)	7 $\frac{1}{2}$ (181)	10 $\frac{1}{8}$ (276)	4,11,36,U
GC45	255	203	145	—	530	6	—	77 (34.9)	—	10 $\frac{1}{4}$ (260)	7 $\frac{1}{2}$ (181)	11 $\frac{1}{2}$ (302)	4,11,36,U
GC8V	165	130	85	121	318	8	—	68 (30.8)	—	10 $\frac{1}{4}$ (260)	7 $\frac{1}{2}$ (181)	11 $\frac{1}{2}$ (283)	4,11,36,G
GC12V	155	—	77	110	292	12	—	90 (40.8)	—	13 $\frac{1}{2}$ (333)	7 $\frac{1}{8}$ (179)	11 $\frac{1}{2}$ (289)	7,11,0
GCSTRAP Golf Car Strap Handle when ordered individually. One strap shipped per full pallet of 6-volt and 8-volt golf car batteries.													
For gas engine golf cars:													
426G	560CA	450CCA	55 RC	—	—	12	—	26 (11.8)	—	8 $\frac{3}{4}$ (222)	6 $\frac{1}{4}$ (171)	8 (203)	17,22,G

Vent Cap Information: All batteries are shipped with quick release one-quarter turn gang vent caps. To order individual vent caps on batteries, add a "V" suffix i.e., GC15V, etc.

All batteries are wet.

All above types have microporous polyethylene envelope separators with glass mat (except 426G).

426G battery has microporous, polyethylene envelope separators.

All batteries manufactured in polypropylene cases.

All ratings conform to B.C.I. specifications.


Dry = Up to 10% reduced capacity.

FOOTNOTES:

Unless otherwise noted all batteries are: Black Cover/Black Case

- 4 - Charcoal Grey Cover and Case
- 7 - Dark blue cover/ dark blue case
- 11 - Low maintenance - Low antimony grids
- 17 - Includes handle
- 22 - Flush manifold vented cover
- 36 - Peak performance capacity
- G - Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut
- O - Offset post w/ vertical stainless steel 5/16" stud and hex nut
- U - Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs and hex nuts

TERMINAL SELECTIONS

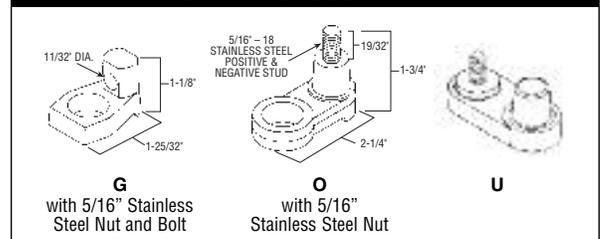

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com

DISTRIBUTED BY: