



PATENTED
**ADVANCED
GENERATION™**
SILVER (Ag) ALLOY

ULTIMATE®



For the discriminating buyer looking for premium maintenance-free performance and longer life in a severe service battery, **DEKA** delivers the "Ultimate" choice. Designed with an advanced silver alloy, the **DEKA ULTIMATE** is ideally suited for the rigorous demands of SUVs, APVs and light trucks. Our engineers have designed a battery that is packed with more power-per-pound and able to meet the rigorous demands in extremely high under-hood temperature conditions. If you want top performance, proven quality, maximum life...and the "Ultimate" design, look no further than the **DEKA ULTIMATE**.



QUALITY SYSTEM
CERTIFIED TO
ISO 9001
ISO/TS 16949
ISO 14001

Deka

ULTIMATE

PATENTED
ADVANCED
GENERATION™
SILVER (Ag) ALLOY

Engineered from the ground up with a unique patented silver alloy to provide premium performance against the most severe climates, the **DEKA ULTIMATE** offers premium quality, superior performance and maximum life.

PATENTED SILVER CALCIUM ALLOY

Provides extended life under hot climate, high under-hood temperatures and severe service conditions.

MAINTENANCE-FREE DESIGN

Delivers maximum starting power. No need to add water.

HEAVIER GRID AND PLATE DESIGN

Provides longest life with twice the wire diameter of typical grids.

SPECIAL NEGATIVE ENVELOPE SEPARATORS

Reduces short circuits due to normal plate shedding and growth.

OVER 250 QUALITY CONTROL CHECKS

Ensures long life and reliability.

ADDED ELECTROLYTE RESERVOIR

Retards plate dry out for longer maintenance-free life.

SPECIALLY DESIGNED "FULL-FRAME GRIDS"


Retards grid growth and internal shorting for longer life in higher temperatures and extreme conditions.

ULTRA-PURE ELECTROLYTE

Increases maintenance-free performance and retards corrosion.

SPECIAL PLATE PASTE

Improves reactivity with the electrolyte to provide more power-per-pound and reduces shedding for maximum life.

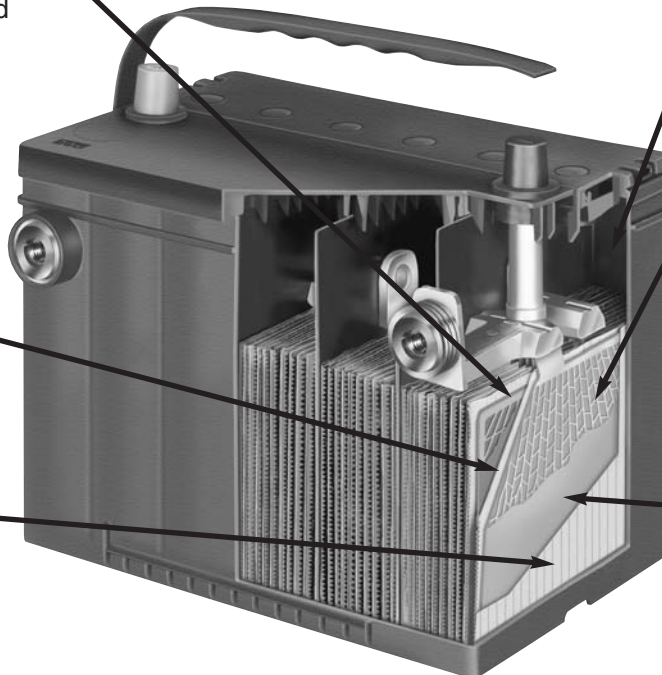

GROUP NO.	PART NO.	PERFORMANCE LEVEL			WARR.	WEIGHT		MAXIMUM OVERALL DIMENSIONS						FOOTNOTES
		CCA @ 0°F	RES. CAP.	REF. CA. @ 32°F		WET	DRY	LENGTH		WIDTH		HEIGHT		
								in.	mm.	in.	mm.	in.	mm.	
34/78	7AG78DT	800	115	940	85	41.5	—	10 3/4	273	6 1/2	175	8	203	14,16,17,18,22,37
	6AG78DT	730	100	865	70	39	—	10 3/4	273	6 1/2	175	8	203	14,16,17,18,22,37
75/86	7AG75DT	690	90	820	85	35.5	—	9 3/4	248	7	178	8 1/2	206	14,16,17,18,22,37
25	7AG25MF	600	90	750	85	35	—	9 3/4	248	6 1/2	175	8 1/2	225	17,22
34	6AG34MF	730	100	865	70	37.5	—	10 3/4	273	6 1/2	175	8	203	17,22
35	7AG35MF	600	90	750	85	35	—	9 3/4	248	6 1/2	175	8 1/2	225	17,22
58	7AG58MF	580	85	720	85	32	—	10	254	7 1/4	184	7	178	17,22
65	7AG65MF	750	140	885	85	45.5	—	12	305	7 1/2	187	7 1/2	194	17,22
	6AG65MF	675	105	840	70	40	—							17,22
66	7AG66MF	750	140	885	85	45.5	—	12	305	7 1/2	187	7 1/2	194	17,22,24
75	7AG75MF	690	90	820	85	35.5	—	9 3/4	248	7	178	7 1/4	184	17,22
78	7AG78MF	800	115	940	85	41.5	—	10 3/4	273	6 1/2	175	7 1/4	184	17,22
	6AG78MF	730	100	865	70	38	—	10 3/4	273	6 1/2	175	7 1/4	184	17,22

All batteries have maintenance-free silver lead alloy grids
All batteries manufactured in black case and black cover except where noted

Ratings conform to B.C.I. specifications.
All batteries manufactured in polypropylene cases.
Maintenance-free batteries have micro-porous, polyethylene envelope separators

FOOTNOTES:

14 - Centerline terminal posts
16 - Dual terminal universal design
17 - Includes handle

18 - Includes top adapter
22 - Flush manifold vented cover
24 - Includes vent tube adapter kit
37 - For height with adapter add 7/8" (22mm)

"POWERED FOR PERFORMANCE"®

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com • e-mail: eastpenn@eastpenn-deka.com

DISTRIBUTED BY: