



PREMIUM  
QUALITY

# SPORTS POWER®

ABSORBED GLASS MAT  
TECHNOLOGY

Advanced  
generation  
technology for  
performance  
and life!



Ideal for ATVs,  
Motorcycles,  
Personal Watercraft  
& Snowmobiles

The **Deka Sports Power AGM Battery** was designed for more than performance, it was designed for the enthusiast. Completely spillproof and leakproof; frequent replacement and high maintenance are over! The absorbed glass mat (AGM) technology increases power while improving rider and environmental safety. The key to this technology is the highly porous microfiber separators which completely absorb and trap the electrolyte. Molded top and side connection terminals provide versatility, increased strength and durability. The **Deka Sports Power AGM Battery** provides the most advanced power and value in the industry, so your customers can enjoy their leisure time, worry free.

### WORRY FREE...

- No Vent tube
- No acid leaks to cause terminal corrosion
- Withstands damaging effects of vibration
- Environmentally friendly, 100% recyclable

### MAINTENANCE FREE...

- No Filling
- No Activation
- Eliminates low water levels
- Low discharge rates for off season storage



QUALITY SYSTEM  
CERTIFIED  
**ISO 9001**  
**ISO/TS 16949**  
ENVIRONMENTAL  
SYSTEM CERTIFIED  
**ISO 14001**

**Specifically Engineered for Demanding Sports Power Use!**



# SPORTS POWER®

ABSORBED GLASS MAT  
TECHNOLOGY

Premium quality, specially designed Absorbed Glass Mat batteries are manufactured under strict quality controls to assure superior performance and long life. The AGM design allows easy installation without the worry of acid spills and damage to equipment.

**FACTORY SEALED, VALVE-REGULATED, MAINTENANCE-FREE DESIGN**  
eliminates damage from acid spills and corrosion, environmentally safe.


**HEAT SEALED COVER**  
eliminates electrolyte leakage and improves reliability.

**MOLDED TOP AND SIDE CONNECTION TERMINAL DESIGN**  
provides ease of installation, increased strength and durability.

**HEAVY-DUTY POSTS**  
resist vibration damage.

**HEAVY TOP LEAD**  
improves plate-to-lug adhesion for vibration resistance, long life and performance.

**CALCIUM POSITIVE AND NEGATIVE, FULL-FRAME POWER PATH GRIDS**  
provide the highest cranking amps and the lowest self-discharge rates for off season storage.

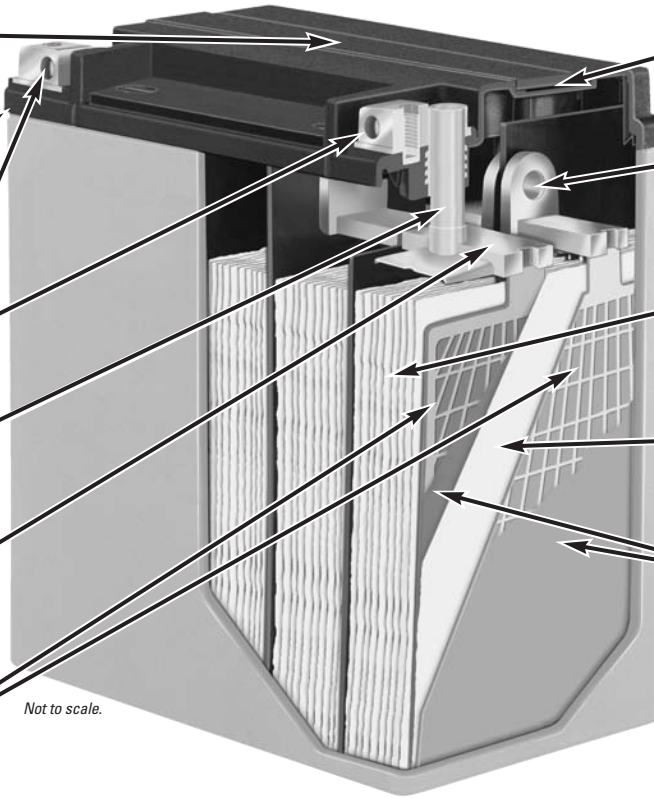

Not to scale.

**UNIQUE, LEAKPROOF PRESSURIZED VENT SYSTEM**  
is engineered for safety and long life. Retards dry-out.

**LARGER THROUGH-PARTITION WELDS**  
increase power output, increases durability.

**ABSORBED DEMINERALIZED ELECTROLYTE**  
improves service life and off-season storage.

**TEAR-RESISTANT, ABSORBED GLASS MAT SEPARATORS**  
retain acid, protect plates, ensuring long life.

**HIGH DENSITY OXIDE**  
provides maximum power-per-pound for dependable "high cycling" service.

**POSITIVE TERMINAL CAP (not shown)**  
protects against short circuits and sparks during transport and storage.

**STAINLESS STEEL TERMINAL BOLTS (not shown)**  
eliminate rust and corrosion.

PART NO.	FOOT-NOTES	CCA @ 0°F	10 AH Rating	APPROX. WT. lbs.	APPROX. WT. kg	LENGTH in.	LENGTH mm	WIDTH in.	WIDTH mm	HEIGHT in.	HEIGHT mm	Replaces these part numbers:
ETX9	2,38,39	120	8	6.3	2.9	5 1/2	150	3 1/16	88	4 1/16	106	YTX9-BS
ETX12	2,38,39	180	10	9.4	4.3	5 1/2	150	3 1/16	88	5 1/2	130	YTX12-BS, YB12B-B2 (56)
ETX14	2,38,39,42,75,77	220	12	12.0	5.4	5 1/2	150	3 1/16	88	5 1/2	145	YTX14-BS, YTX16-BS, YTX16-BS-1, YB16B-A (56), YB16B-A1 (56)
ETX15	2,38,39,42,76	220	14	11.0	5.0	5 1/2	134	3 1/2	90	6 1/16	166	YB14-A2, YB14-B2, YB14A-A1, YB14A-A2
ETX15L	2,38,39	220	14	11.0	5.0	5 1/2	134	3 1/2	90	6 1/16	166	YB14L-A1, YB14L-A2, YB14L-B2, 12N14-3A, SYB14L-A2 (65), SYB14L-B2 (65)
ETX16	2,38,39,42,74,77	325	19	17.0	7.7	6 1/2	175	4	100	6 1/2	155	YB16-B-CX, YB16-B, Y60-N24-A (56), YB16C-B
ETX16L	2,38,39,42,74,77	325	19	17.0	7.7	6 1/2	175	4	100	6 1/2	155	YB16HL-A-CX, YB16L-B, 12N16-3B, Y60-N24L-B (56), YB16CL-B, 12N24-3 (56), 12N24-3A (56)
ETX18L	2,38,39,77	340	20	18.0	8.2	8 1/2	206	3 3/16	91	6 1/2	163	Y50-N18L-A-CX, Y50-N18L-A-LM, Y50-N18L-A, Y50-N18L-A3, SY50-N18L-AT (65)
ETX20L	2,38,39,77	310	17.5	15.5	7.0	6 1/2	177	3 3/16	88	6 1/2	155	YTX20L-BS, YB18L-A (56)
ETX30L	2,38,39,77	400	26	21.7	9.8	6 1/2	168	5 1/16	131	6 1/2	176	YIX30L, YB30L-B, YB30CL-B (56)
ETX30LA	2,38,39,77,78	400	26	21.7	9.8	6 1/2	168	5 1/16	131	7 1/2	197	YB30CL-B

**FOOTNOTES:** 2 - Black cover / Gray case.  
38 - "Non-spillable" defined by DOT (Department of Transportation) definitions  
39 - "Non-spillable" defined by ICAO (International Commercial Airline Organization) and IATA (International Airline Transport Association) definitions  
42 - Height without adapter  
56 - Hold-down modifications may be necessary

65 - Includes sensor not supplied with AGM  
74 - Shipped with 20mm adapter  
75 - Shipped with two (2) 17mm adapters  
76 - Shipped with 10mm adapter  
77 - Does not meet Harley-Davidson OEM specifications  
78 - Shipped with 22mm height adapter

"POWERED FOR PERFORMANCE"®

**EAST PENN manufacturing co., inc.**

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781  
Order Department Hotline: 610-682-4231  
www.dekabatteries.com • e-mail: eastpenn@eastpenn-deka.com

DISTRIBUTED BY: